

EN

IT

DE

FR

ES



PRODUCT OUTLINE



MADE IN ITALY



texaindustries.com



① SEDE E STABILIMENTO 1

② STABILIMENTO 2

③ SERVICE

① HEADQUARTERS AND PLANT 1

② PLANT 2

③ SERVICE





● **PER TUTTE LE ESIGENZE DI GESTIONE TERMICA**

● **FOR ALL THERMAL MANAGEMENT REQUIREMENTS**

● **LINEA CLIMATIZZAZIONE**

● **AIR CONDITIONING RANGE**



● **LINEA REFRIGERAZIONE**

● **REFRIGERATION RANGE**



Ogni sforzo è stato fatto per fornire dati e descrizioni accurate. Dato il continuo sviluppo e miglioramento dei prodotti, tutte le informazioni in questo catalogo possono essere modificate senza preavviso.

All efforts have been made to provide accurate data and descriptions. However, due to our continuous development and improvement of our products, all information in this catalogue is subject to change without notice.

SKY

- Door- or wall-mount air conditioners
- Condizionatori per montaggio a porta o parete
- Klimageräte zur Installation an der Tür oder der Wand
- Climatiseurs pour montage sur porte ou mural
- Acondicionadores para montaje en puerta o pared



Item Codice Artikelnummer Code Referencia	Cooling capacity Potenza frigorifera Kühlleistung Puissance frigorifique Potencia frigorífica EN14511 - A35A35	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD	Conformity Conformità Konformität Conformité Conformidad
SKY10BT0B	1050 W	230 V 1~ 50-60 Hz	400 x 950 x 233 mm	CE
SKY10CT0B	1050 W	115 V 1~ 50-60 Hz	400 x 950 x 233 mm	CE
SKY10GT0B	1050 W	400/440 V 2~ 50-60 Hz	400 x 950 x 233 mm	CE
SKY15BT0B	1550 W	230 V 1~ 50-60 Hz	400 x 950 x 233 mm	CE
SKY15CT0B	1550 W	115 V 1~ 50-60 Hz	400 x 950 x 233 mm	CE
SKY15GT0B	1550 W	400/440 V 2~ 50-60 Hz	400 x 950 x 233 mm	CE
SKY20BT0B	2050 W	230 V 1~ 50-60 Hz	400 x 1265 x 236 mm	CE
SKY20CT0B	2050 W	115 V 1~ 50-60 Hz	400 x 1265 x 236 mm	CE
SKY20LT0B	2050 W	400 V 3~ 50-60 Hz	400 x 1265 x 236 mm	CE

FLY

- Door- or wall-mount air conditioners
- Condizionatori per montaggio a porta o parete
- Klimageräte zur Installation an der Tür oder der Wand
- Climatiseurs pour montage sur porte ou mural
- Acondicionadores para montaje en puerta o pared



Item Codice Artikelnummer Code Referencia	Cooling capacity Potenza frigorifera Kühlleistung Puissance frigorifique Potencia frigorífica EN14511 - A35A35	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD	Conformity Conformità Konformität Conformité Conformidad
FLY11BTUB	1100 W	230 V 1~ 50-60 Hz	495 x 1697 x 195 mm	CE - UL
FLY11KTUB	1100 W	400/460 V 2~ 50-60 Hz	495 x 1697 x 195 mm	CE - UL
FLY15BTUB	1500 W	230 V 1~ 50-60 Hz	495 x 1697 x 195 mm	CE - UL
FLY15KTUB	1500 W	400/460 V 2~ 50-60 Hz	495 x 1697 x 195 mm	CE - UL
FLY20BTUB	2000 W	230 V 1~ 50-60 Hz	495 x 1697 x 195 mm	CE - UL
FLY20HTUB	2000 W	400 V 3~ 50 Hz/460 V 3~ 60 Hz	495 x 1697 x 195 mm	CE - UL
FLY25BTUB	2500 W	230 V 1~ 50-60 Hz	495 x 1697 x 235 mm	CE - UL
FLY25HTUB	2500 W	400 V 3~ 50 Hz/460 V 3~ 60 Hz	495 x 1697 x 235 mm	CE - UL
FLY32BTUB	3200 W	230 V 1~ 50-60 Hz	495 x 1697 x 235 mm	CE - UL
FLY32HTUB	3200 W	400 V 3~ 50 Hz/460 V 3~ 60 Hz	495 x 1697 x 235 mm	CE - UL

EGO

- Door- or wall-mount air conditioners
- Condizionatori per montaggio a porta o parete
- Klimageräte zur Installation an der Tür oder der Wand
- Climatiseurs pour montage sur porte ou mural
- Acondicionadores para montaje en puerta o pared



Item Codice Artikelnummer Code Referencia	Cooling capacity Potenza frigorifera Kühlleistung Puissance frigorifique Potencia frigorífica EN14511 - A35A35	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD	Conformity Conformità Konformität Conformité Conformidad
EGOS3BT1B	300 W	230 V 1~ 50-60 Hz	525 x 345 x 136 mm	CE
EGO04BT1B	380 W	230 V 1~ 50-60 Hz	285 x 460 x 180 mm	CE
EGO04BTVBX0000	380 W	230 V 1~ 50-60 Hz	285 x 460 x 180 mm	CE - UL
EGO04CT1B	380 W	115 V 1~ 50-60 Hz	285 x 460 x 180+35 mm	CE
EGO06BT1B	640 W	230 V 1~ 50-60 Hz	316 x 606 x 212 mm	CE
EGO06BTVBX0000	640 W	230 V 1~ 50-60 Hz	316 x 606 x 212 mm	CE - UL
EGO06CT1B	640 W	115 V 1~ 50-60 Hz	316 x 606 x 212+42 mm	CE
EGO06GT1B	640 W	400/440 V 2~ 50-60 Hz	316 x 606 x 212+58 mm	CE
EGO08BT1B	820 W	230 V 1~ 50-60 Hz	348 x 783 x 216 mm	CE
EGO08BTVBX0000	820 W	230 V 1~ 50-60 Hz	348 x 783 x 216 mm	CE - UL
EGO08CT1B	820 W	115 V 1~ 50-60 Hz	348 x 783 x 216+42 mm	CE
EGO08GT1B	820 W	400/440 V 2~ 50-60 Hz	348 x 783 x 216+58 mm	CE
EGO10BT1B	1000 W	230 V 1~ 50-60 Hz	348 x 783 x 216 mm	CE
EGO10BTVBX0000	1000 W	230 V 1~ 50-60 Hz	348 x 783 x 216 mm	CE - UL
EGO10CT1B	1000 W	115 V 1~ 50-60 Hz	348 x 783 x 216+42 mm	CE
EGO10GT1B	1000 W	400/440 V 2~ 50-60 Hz	348 x 783 x 216+58 mm	CE
EGO10KTVBX0000	1000 W	400/460 V 2~ 50-60 Hz	348 x 783 x 216+58 mm	CE - UL
EGO12BT1B	1250 W	230 V 1~ 50-60 Hz	405 x 999 x 237 mm	CE
EGO12BTVBX0000	1250 W	230 V 1~ 50-60 Hz	405 x 999 x 237 mm	CE - UL
EGO12CT1B	1250 W	115 V 1~ 50-60 Hz	405 x 999 x 237 mm	CE
EGO12GT1B	1250 W	400/440 V 2~ 50-60 Hz	405 x 999 x 237 mm	CE
EGO16BT1B	1600 W	230 V 1~ 50-60 Hz	405 x 999 x 237 mm	CE
EGO16BTVBX0000	1600 W	230 V 1~ 50-60 Hz	405 x 999 x 237 mm	CE - UL
EGO16CT1B	1600 W	115 V 1~ 50-60 Hz	405 x 999 x 237 mm	CE
EGO16GT1B	1600 W	400/440 V 2~ 50-60 Hz	405 x 999 x 237 mm	CE
EGO16KTVBX0000	1600 W	400/460 V 2~ 50-60 Hz	405 x 999 x 237 mm	CE - UL
EGO20BT1B	2000 W	230 V 1~ 50-60 Hz	405 x 999 x 237 mm	CE
EGO20BTVBX0000	2000 W	230 V 1~ 50-60 Hz	405 x 999 x 237 mm	CE - UL
EGO20CT1B	2000 W	115 V 1~ 50-60 Hz	405 x 999 x 237 mm	CE
EGO20LT1B	2000 W	400 V 3~ 50-60 Hz	405 x 999 x 237 mm	CE
EGO20NTVBX0000	2000 W	460 V 3~ 60 Hz	405 x 999 x 237 mm	CE - UL
EGO30BT1B	2900 W	230 V 1~ 50-60 Hz	500 x 1270 x 336 mm	CE
EGO30LT1B	2900 W	400 V 3~ 50-60 Hz	500 x 1270 x 336 mm	CE
EGO30NTVBX0000	2900 W	460 V 3~ 60 Hz	500 x 1270 x 336 mm	CE - UL
EGO40BT1B	3850 W	230 V 1~ 50-60 Hz	500 x 1270 x 336 mm	CE
EGO40LT1B	3850 W	400 V 3~ 50-60 Hz	500 x 1270 x 336 mm	CE
EGO40NTVBX0000	3850 W	460 V 3~ 60 Hz	500 x 1270 x 336 mm	CE - UL
EGO60MTEB	5800 W	400 V 3~ 50 Hz	600 x 2000 x 387 mm	CE
EGO60NTEB	6050 W	460 V 3~ 60 Hz	600 x 2000 x 387 mm	CE
EGO80MTEB	7600 W	400 V 3~ 50 Hz	800 x 2000 x 387 mm	CE
EGO80NTEB	7950 W	460 V 3~ 60 Hz	800 x 2000 x 387 mm	CE
EGOA0MTEB	9400 W	400 V 3~ 50 Hz	800 x 2000 x 387 mm	CE
EGOA0NTEB	9850 W	460 V 3~ 60 Hz	800 x 2000 x 387 mm	CE
EGOA5MTEB	14800 W	400 V 3~ 50 Hz	800 x 2000 x 550 mm	CE
EGOA5NTEB	15150 W	460 V 3~ 60 Hz	800 x 2000 x 550 mm	CE

DEK

- Roof-mount air conditioners
- Condizionatori per montaggio a tetto
- Klimageräte zur Installation auf dem Dach
- Climatiseurs pour montage sur toit
- Acondicionadores para montaje en techo



Item Codice Artikelnummer Code Referencia	Cooling capacity Potenza frigorifera Kühlleistung Puissance frigorifique Potencia frigorífica EN14511 - A35A35	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD	Conformity Conformità Konformität Conformité Conformidad
DEK04BT0B	410 W	230 V 1~ 50-60 Hz	259 x 260 x 481 mm	CE
DEK04BTUB	410 W	230 V 1~ 50-60 Hz	259 x 260 x 481 mm	CE - UL
DEK04CT0B	410 W	115 V 1~ 50-60 Hz	259 x 260 x 481 mm	CE
DEK08BT0B	820 W	230 V 1~ 50-60 Hz	341 x 339 x 600 mm	CE
DEK08BTUB	820 W	230 V 1~ 50-60 Hz	341 x 339 x 600 mm	CE - UL
DEK08CT0B	820 W	115 V 1~ 50-60 Hz	341 x 339 x 600 mm	CE
DEK08GT0B	820 W	400/440 V 2~ 50-60 Hz	341 x 339 x 600 mm	CE
DEK12BT0B	1150 W	230 V 1~ 50-60 Hz	401 x 415 x 572 mm	CE
DEK12BTUB	1150 W	230 V 1~ 50-60 Hz	401 x 415 x 572 mm	CE - UL
DEK12CT0B	1150 W	115 V 1~ 50-60 Hz	401 x 415 x 572 mm	CE
DEK12GT0B	1150 W	400/440 V 2~ 50-60 Hz	401 x 415 x 572 mm	CE
DEK15BT0B	1550 W	230 V 1~ 50-60 Hz	401 x 415 x 572 mm	CE
DEK15BTUB	1550 W	230 V 1~ 50-60 Hz	401 x 415 x 572 mm	CE - UL
DEK15CT0B	1550 W	115 V 1~ 50-60 Hz	401 x 415 x 572 mm	CE
DEK15GT0B	1550 W	400/440 V 2~ 50-60 Hz	401 x 415 x 572 mm	CE
DEK20BT0B	2050 W	230 V 1~ 50-60 Hz	401 x 415 x 572 mm	CE
DEK20CT0B	2050 W	115 V 1~ 50-60 Hz	401 x 415 x 572 mm	CE
DEK20LT0B	2050 W	400 V 3~ 50-60 Hz	401 x 415 x 572 mm	CE
DEK20NTUB	2050 W	460 V 3~ 60 Hz	401 x 415 x 572 mm	CE - UL
DEK30BT0B	2900 W	230 V 1~ 50-60 Hz	492 x 496 x 784 mm	CE
DEK30LT0B	2900 W	400 V 3~ 50-60 Hz	492 x 496 x 784 mm	CE
DEK30NTUB	2900 W	460 V 3~ 60 Hz	492 x 496 x 784 mm	CE - UL
DEK40BT0B	3850 W	230 V 1~ 50-60 Hz	492 x 496 x 784 mm	CE
DEK40LT0B	3850 W	400 V 3~ 50-60 Hz	492 x 496 x 784 mm	CE
DEK40NTUB	3850 W	460 V 3~ 60 Hz	492 x 496 x 784 mm	CE - UL

EMO

- Wall-mount air conditioners for outdoor applications
- Condizionatori da parete per applicazioni outdoor
- Klimageräte zur Installation an der Wand für Outdoor-Anwendungen
- Climatiseurs à montage mural pour applications extérieures
- Acondicionadores de pared para aplicaciones al aire libre



Item Codice Artikelnummer Code Referencia	Cooling capacity Potenza frigorifera Kühlleistung Puissance frigorifique Potencia frigorífica EN14511 - A35A35	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD	Conformity Conformità Konformität Conformité Conformidad
EMO04BM1B	380 W	230 V 1~ 50-60 Hz	300 x 572 x 205 mm	CE
EMO04CM1B	380 W	115 V 1~ 50-60 Hz	300 x 572 x 205+35 mm	CE
EMO06BM1B	640 W	230 V 1~ 50-60 Hz	331 x 718 x 235 mm	CE
EMO06CM1B	640 W	115 V 1~ 50-60 Hz	331 x 718 x 235+42 mm	CE
EMO06GM1B	640 W	400/440 V 2~ 50-60 Hz	331 x 718 x 235+58 mm	CE
EMO08BM1B	820 W	230 V 1~ 50-60 Hz	363 x 895 x 239 mm	CE
EMO08CM1B	820 W	115 V 1~ 50-60 Hz	363 x 895 x 239+42 mm	CE
EMO08GM1B	820 W	400/440 V 2~ 50-60 Hz	363 x 895 x 239+58 mm	CE
EMO10BM1B	1000 W	230 V 1~ 50-60 Hz	363 x 895 x 239 mm	CE
EMO10CM1B	1000 W	115 V 1~ 50-60 Hz	363 x 895 x 239+42 mm	CE
EMO10GM1B	1000 W	400/440 V 2~ 50-60 Hz	363 x 895 x 239+58 mm	CE
EMO12BM1B	1250 W	230 V 1~ 50-60 Hz	415 x 1109 x 261 mm	CE
EMO12CM1B	1250 W	115 V 1~ 50-60 Hz	415 x 1109 x 261 mm	CE
EMO12GM1B	1250 W	400/440 V 2~ 50-60 Hz	415 x 1109 x 261 mm	CE
EMO16BM1B	1600 W	230 V 1~ 50-60 Hz	415 x 1109 x 261 mm	CE
EMO16CM1B	1600 W	115 V 1~ 50-60 Hz	415 x 1109 x 261 mm	CE
EMO16GM1B	1600 W	400/440 V 2~ 50-60 Hz	415 x 1109 x 261 mm	CE
EMO20BM1B	2000 W	230 V 1~ 50-60 Hz	415 x 1109 x 261 mm	CE
EMO20CM1B	2000 W	115 V 1~ 50-60 Hz	415 x 1109 x 261 mm	CE
EMO20LM1B	2000 W	400 V 3~ 50-60 Hz	415 x 1109 x 261 mm	CE
EMO30BM1B	2900 W	230 V 1~ 50-60 Hz	512 x 1417 x 365 mm	CE
EMO30LM1B	2900 W	400 V 3~ 50-60 Hz	512 x 1417 x 365 mm	CE
EMO40BM1B	3850 W	230 V 1~ 50-60 Hz	512 x 1417 x 365 mm	CE
EMO40LM1B	3850 W	400 V 3~ 50-60 Hz	512 x 1417 x 365 mm	CE
EMO60MMEB	5800 W	400 V 3~ 50 Hz	600 x 2000 x 387 mm	CE
EMO60NMEB	6050 W	460 V 3~ 60 Hz	600 x 2000 x 387 mm	CE
EMO80MMEB	7600 W	400 V 3~ 50 Hz	800 x 2000 x 387 mm	CE
EMO80NMEB	7950 W	460 V 3~ 60 Hz	800 x 2000 x 387 mm	CE
EMOA0MMEB	9400 W	400 V 3~ 50 Hz	800 x 2000 x 387 mm	CE
EMOA0NMEB	9850 W	460 V 3~ 60 Hz	800 x 2000 x 387 mm	CE

BLU-BIT

- Air-water heat exchangers
- Scambiatori di calore aria-acqua
- Luft/Wasser-Wärmetauscher
- Échangeurs de chaleur air - eau
- Intercambiadores de calor aire-agua

Item Codice Artikelnummer Code Referencia	Cooling capacity Potenza frigorifera Kühlleistung Puissance frigorifique Potencia frigorífica W10A35	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD	Conformity Conformità Konformität Conformité Conformidad
BIT25BX0B	2500 W	230 V 1~ 50-60 Hz	400 x 270 x 540 mm	CE
BIT25CX0B	2500 W	115 V 1~ 50-60 Hz	400 x 270 x 540 mm	CE
BLU10BX0B	1000 W	230 V 1~ 50-60 Hz	311 x 453 x 115 mm	CE
BLU10BXUB	1000 W	230 V 1~ 50-60 Hz	311 x 453 x 115 mm	CE - UL
BLU10CX0B	1000 W	115 V 1~ 50-60 Hz	311 x 453 x 115 mm	CE
BLU18BX0B	1750 W	230 V 1~ 50-60 Hz	398 x 901 x 137 mm	CE
BLU18BXUB	1750 W	230 V 1~ 50-60 Hz	398 x 901 x 137 mm	CE - UL
BLU18CX0B	1750 W	115 V 1~ 50-60 Hz	398 x 901 x 137 mm	CE
BLU25BX0B	2500 W	230 V 1~ 50-60 Hz	398 x 901 x 137 mm	CE
BLU25BXUB	2500 W	230 V 1~ 50-60 Hz	398 x 901 x 137 mm	CE - UL
BLU25CX0B	2500 W	115 V 1~ 50-60 Hz	398 x 901 x 137 mm	CE
BLU35BX0B	3500 W	230 V 1~ 50-60 Hz	398 x 1148 x 163 mm	CE
BLU35BXUB	3500 W	230 V 1~ 50-60 Hz	398 x 1148 x 163 mm	CE - UL
BLU35CX0B	3500 W	115 V 1~ 50-60 Hz	398 x 1148 x 163 mm	CE
BLU45BX0B	4500 W	230 V 1~ 50-60 Hz	398 x 1148 x 163 mm	CE
BLU45BXUB	4500 W	230 V 1~ 50-60 Hz	398 x 1148 x 163 mm	CE - UL
BLU45CX0B	4500 W	115 V 1~ 50-60 Hz	398 x 1148 x 163 mm	CE
BLU60BX0B	6000 W	230 V 1~ 50-60 Hz	450 x 1502 x 163 mm	CE
BLU60BXUB	6000 W	230 V 1~ 50-60 Hz	450 x 1502 x 163 mm	CE - UL
BLU60CX0B	6000 W	115 V 1~ 50-60 Hz	450 x 1502 x 163 mm	CE
BLU60GX0B	6000 W	400/440 V 2~ 50-60 Hz	450 x 1502 x 163 mm	CE
BLUA0BX0B	10000 W	230 V 1~ 50-60 Hz	797 x 1935 x 206 mm	CE
BLUA0GX0B	10000 W	400/440 V 2~ 50-60 Hz	797 x 1935 x 206 mm	CE
BLUA5BX0B	15000 W	230 V 1~ 50-60 Hz	797 x 1935 x 206 mm	CE
BLUA5GX0B	15000 W	400/440 V 2~ 50-60 Hz	797 x 1935 x 206 mm	CE



MIX

- Air-air heat exchangers
- Scambiatori di calore aria-aria
- Luft/Luft-Wärmetauscher
- Échangeurs de chaleur air - air
- Intercambiadores de calor aire-aire

Item Codice Artikelnummer Code Referencia	Specific cooling power Potenza termica specifica Spezifische thermische Leistung Puissance thermique spécifique Potencia térmica específica	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD	Conformity Conformità Konformität Conformité Conformidad
MIX22BX0B	22 W/K	230 V 1~ 50-60 Hz	189 x 413 x 149 mm	CE
MIX22CX0B	22 W/K	115 V 1~ 50-60 Hz	189 x 413 x 149 mm	CE
MIX36BX0B	36 W/K	230 V 1~ 50-60 Hz	316 x 771 x 103 mm	CE
MIX36CX0B	36 W/K	115 V 1~ 50-60 Hz	316 x 771 x 103 mm	CE
MIX50BX0B	50 W/K	230 V 1~ 50-60 Hz	316 x 771 x 103 mm	CE
MIX50CX0B	50 W/K	115 V 1~ 50-60 Hz	316 x 771 x 103 mm	CE
MIX80BX0B	80 W/K	230 V 1~ 50-60 Hz	317 x 1260 x 148 mm	CE
MIX80CX0B	80 W/K	115 V 1~ 50-60 Hz	317 x 1260 x 148 mm	CE



FAN

- Ventilation units with filter
- Gruppi di ventilazione con filtro
- Lüftereinheiten mit Filter
- Groupes de ventilation avec filtre
- Grupos de ventilación con filtro



Item Codice Artikelnummer Code Referencia	Air flow rate Portata aria Luftdurchsatz Débit air Caudal de aire	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD	Conformity Conformità Konformität Conformité Conformidad
FIL08XN0B	-	-	114 x 114 x 21 mm	CE
FAN08BN0B	36/41 m³/h	230 V 1~ 50-60 Hz	114 x 114 x 64 mm	CE
FAN08CN0B	36/41 m³/h	115 V 1~ 50-60 Hz	114 x 114 x 64 mm	CE
FAN08UN0B	44 m³/h	24 V DC	114 x 114 x 64 mm	CE
FAN08VN0B	44 m³/h	48 V DC	114 x 114 x 64 mm	CE
FIL12XN0B	-	-	150 x 150 x 24 mm	CE
FAN12BN0B	57/61 m³/h	230 V 1~ 50-60 Hz	150 x 150 x 67 mm	CE
FAN12CN0B	57/61 m³/h	115 V 1~ 50-60 Hz	150 x 150 x 67 mm	CE
FAN12UN0B	60 m³/h	24 V DC	150 x 150 x 67 mm	CE
FAN12VN0B	60 m³/h	48 V DC	150 x 150 x 67 mm	CE
FIL25XN0B	-	-	250 x 250 x 26 mm	CE
FAN23BN0B	115/125 m³/h	230 V 1~ 50-60 Hz	250 x 250 x 102 mm	CE
FAN23CN0B	115/125 m³/h	115 V 1~ 50-60 Hz	250 x 250 x 102 mm	CE
FAN23UN0B	120 m³/h	24 V DC	250 x 250 x 102 mm	CE
FAN23VN0B	120 m³/h	48 V DC	250 x 250 x 102 mm	CE
FAN25BN0B	230/262 m³/h	230 V 1~ 50-60 Hz	250 x 250 x 114 mm	CE
FAN25CN0B	230/262 m³/h	115 V 1~ 50-60 Hz	250 x 250 x 114 mm	CE
FAN25UN0B	230 m³/h	24 V DC	250 x 250 x 114 mm	CE
FAN25VN0B	230 m³/h	48 V DC	250 x 250 x 114 mm	CE
FAN28BN0B	400/440 m³/h	230 V 1~ 50-60 Hz	250 x 250 x 98 mm	CE
FAN28CN0B	400/440 m³/h	115 V 1~ 50-60 Hz	250 x 250 x 98 mm	CE
FAN28LN0B	400/440 m³/h	400 V 3~ 50-60 Hz	250 x 250 x 98 mm	CE
FIL35XN0B	-	-	325 x 325 x 28 mm	CE
FAN35BN0B	520/580 m³/h	230 V 1~ 50-60 Hz	325 x 325 x 153 mm	CE
FAN35CN0B	520/580 m³/h	115 V 1~ 50-60 Hz	325 x 325 x 153 mm	CE
FAN35LN0B	520/580 m³/h	400 V 3~ 50-60 Hz	325 x 325 x 153 mm	CE
FAN39BN0B	920/940 m³/h	230 V 1~ 50-60 Hz	325 x 325 x 118 mm	CE
FAN39CN0B	920/940 m³/h	115 V 1~ 50-60 Hz	325 x 325 x 118 mm	CE



DLK

- Roof-mount fans
- Torrini di ventilazione
- Lüftungsvorrichtungen
- Tours de ventilation
- Torretas de ventilación



Item Codice Artikelnummer Code Referencia	Air flow rate Portata aria Luftdurchsatz Débit air Caudal de aire	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD	Conformity Conformità Konformität Conformité Conformidad
DLR19XX0B	-	-	375 x 122 x 375 mm	CE
DLK19BX0B	600/625 m³/h	230 V 1~ 50-60 Hz	375 x 122 x 375 mm	CE
DLK19CX0B	600/625 m³/h	115 V 1~ 50-60 Hz	375 x 122 x 375 mm	CE
DLK22BX0B	1050/1085 m³/h	230 V 1~ 50-60 Hz	375 x 122 x 375 mm	CE
DLK22CX0B	1050/1085 m³/h	115 V 1~ 50-60 Hz	375 x 122 x 375 mm	CE
DLK25BX0B	1380/1460 m³/h	230 V 1~ 50-60 Hz	375 x 122 x 375 mm	CE
DLK42BX0B	2300/2530 m³/h	230 V 1~ 50-60 Hz	637 x 272 x 637 mm	CE
DLK45BX0B	3000/3370 m³/h	230 V 1~ 50-60 Hz	637 x 272 x 637 mm	CE
DLK48BX0B	4000/4520 m³/h	230 V 1~ 50-60 Hz	637 x 272 x 637 mm	CE

WID

- Anti-condensation heaters
- Riscaldatori anticondensa
- Kondenswasserschutzheizgeräte
- Réchauffeurs anti-condensation
- Calefactores anticondensación



Item Codice Artikelnummer Code Referencia	Heating power Potenza riscaldamento Heizleistung Puissance chauffage Potencia de calefacción	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD	Conformity Conformità Konformität Conformité Conformidad
WID01ZX0X	10 W	110-250 V AC/DC	50 x 61 x 25 mm	CE
WID02ZX0X	20 W	110-250 V AC/DC	50 x 71 x 25 mm	CE
WID03ZX0X	30 W	110-250 V AC/DC	50 x 81 x 25 mm	CE
WID05ZX0X	45 W	110-250 V AC/DC	70 x 109 x 50 mm	CE
WID05ZX0P	50 W	110-250 V AC/DC	60 x 110 x 90 mm	CE
WID10ZX0X	100 W	110-250 V AC/DC	70 x 184 x 50 mm	CE
WID10ZX0P	100 W	110-250 V AC/DC	60 x 110 x 90 mm	CE
WID10BL0C	100 W	230 V 1~ 50-60 Hz	80 x 112 x 47 mm	CE
WID15ZX0X	150 W	110-250 V AC/DC	70 x 264 x 50 mm	CE
WID15ZX0P	150 W	110-250 V AC/DC	60 x 150 x 90 mm	CE
WID15BL0C	150 W	230 V 1~ 50-60 Hz	80 x 112 x 47 mm	CE
WID20BL0C	200 W	230 V 1~ 50-60 Hz	119 x 151 x 47 mm	CE
WID30BL0C	300 W	230 V 1~ 50-60 Hz	119 x 151 x 47 mm	CE
WID35BL0T	350 W	230 V 1~ 50-60 Hz	100 x 165 x 128 mm	CE
WID40BL0C	400 W	230 V 1~ 50-60 Hz	119 x 151 x 47 mm	CE
WID55BL0T	550 W	230 V 1~ 50-60 Hz	100 x 165 x 128 mm	CE

TCW Minichiller

- Industrial water chillers
- Refrigeratori industriali per acqua
- Wasserkühlgeräte für Industrieanwendungen
- Réfrigérateurs industriels pour eau
- Refrigeradores industriales para agua



Item Codice Artikelnummer Code Referencia	Cooling capacity Capacità di raffreddamento Kühlleistung Capacité de refroidissement Capacidad de enfriamiento	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD
TCW08	900/1100 W	230 V 1~ 50-60 Hz	725 x 367 x 454 mm
TCW12	1600/1900 W	230 V 1~ 50-60 Hz	725 x 367 x 454 mm
TCW19	2200/2550 W	230 V 1~ 50-60 Hz	725 x 367 x 454 mm
TCW30	3000/3450 W	230 V 1~ 50-60 Hz	725 x 367 x 454 mm
TCW40	3900/4450 W	230 V 1~ 50-60 Hz	725 x 367 x 454 mm

TCO Minichiller

- Industrial oil chillers
- Refrigeratori industriali per olio
- Ölkühlgeräte für Industrieanwendungen
- Réfrigérateurs industriels pour huile
- Refrigeradores industriales para aceite



Item Codice Artikelnummer Code Referencia	Cooling capacity Capacità di raffreddamento Kühlleistung Capacité de refroidissement Capacidad de enfriamiento	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD
TCO08	900/1100 W	230 V 1~ 50-60 Hz	725 x 367 x 454 mm
TCO12	1600/1900 W	230 V 1~ 50-60 Hz	725 x 367 x 454 mm
TCO19	2200/2550 W	230 V 1~ 50-60 Hz	725 x 367 x 454 mm
TCO30	3000/3450 W	230 V 1~ 50-60 Hz	725 x 367 x 454 mm
TCO40	3900/4450 W	230 V 1~ 50-60 Hz	725 x 367 x 454 mm

TCW

- Industrial water chillers
- Refrigeratori industriali per acqua
- Wasserkühlgeräte für Industrieanwendungen
- Réfrigérateurs industriels pour eau
- Refrigeradores industriales para agua

Item Codice Artikelnummer Code Referencia	Cooling capacity Capacità di raffreddamento Kühlleistung Capacité de refroidissement Capacidad de enfriamiento	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD
TCW15	1600/1900 W	230 V 1~ 50-60 Hz	595 x 995 x 678 mm
TCW22	2200/2550 W	230 V 1~ 50-60 Hz	595 x 995 x 678 mm
TCW22	2200 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCW36	3300/3900 W	230 V 1~ 50-60 Hz	595 x 995 x 678 mm
TCW36	3300 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCW44	4400 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCW55	5300 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCW56	6000 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
TCW70	8100 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
TCW91	9200 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
TCWA0	10900 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
TCWA2	12300 W	400 V 3~ 50 Hz	744 x 1335 x 1360 mm
TCWA4	16400 W	400 V 3~ 50 Hz	744 x 1335 x 1360 mm
TCWA7	17800 W	400 V 3~ 50 Hz	744 x 1335 x 1360 mm
TCWA9	20700 W	400 V 3~ 50 Hz	744 x 1335 x 1360 mm
TCWB2	23000 W	400 V 3~ 50 Hz	844 x 1485 x 1759 mm
TCWB7	28300 W	400 V 3~ 50 Hz	844 x 1485 x 1759 mm
TCWC1	32800 W	400 V 3~ 50 Hz	844 x 1485 x 1759 mm
TCWC8	37600 W	400 V 3~ 50 Hz	844 x 1485 x 1759 mm
TCWD4	41400 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm
TCWE0	46100 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm
TCWE4	56600 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm
TCWF7	65600 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm
TCWG8	75200 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm
TCWH2	82800 W	400 V 3~ 50 Hz	1508 x 1870 x 2554 mm
TCWI3	92200 W	400 V 3~ 50 Hz	1508 x 1870 x 2554 mm
TCWM4	113200 W	400 V 3~ 50 Hz	1508 x 1870 x 2554 mm
TCWO1	131200 W	400 V 3~ 50 Hz	1508 x 1870 x 2554 mm
TCWQ0	150400 W	400 V 3~ 50 Hz	1508 x 1870 x 2554 mm
TCWR2	166600 W	400 V 3~ 50 Hz	1904 x 2235 x 4304 mm
TCWS4	184400 W	400 V 3~ 50 Hz	1904 x 2235 x 4304 mm
TCWT6	226400 W	400 V 3~ 50 Hz	1904 x 2235 x 4304 mm
TCWV3	262400 W	400 V 3~ 50 Hz	1904 x 2235 x 4304 mm
TCWZ0	300800 W	400 V 3~ 50 Hz	1904 x 2235 x 4304 mm
TCW3E	355000 W	400 V 3~ 50 Hz	2194 x 2390 x 5804 mm
TCW4A	400000 W	400 V 3~ 50 Hz	2194 x 2390 x 5804 mm



LCW

- Negative temperature liquid chillers
- Refrigeratori di fluidi a temperature negative
- Mediumkühlgeräte für negative Temperaturen
- Réfrigérateurs de fluides à températures négatives
- Refrigeradores de fluidos a temperaturas negativas

Item Codice Artikelnummer Code Referencia	Cooling capacity Capacità di raffreddamento Kühlleistung Capacité de refroidissement Capacidad de enfriamiento	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD
LCW15	2200 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
LCW22	3400 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
LCW45	6500 W	400 V 3~ 50 Hz	744 x 1334 x 1358 mm
LCW70	10450 W	400 V 3~ 50 Hz	744 x 1334 x 1358 mm
LCWA2	13000 W	400 V 3~ 50 Hz	844 x 1485 x 1759 mm
LCWA8	19600 W	400 V 3~ 50 Hz	844 x 1485 x 1759 mm
LCWB5	24100 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm
LCWC4	34800 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm



TCO

- Industrial oil chillers
- Refrigeratori industriali per olio
- Ölkühlgeräte für Industrieanwendungen
- Réfrigérateurs industriels pour huile
- Refrigeradores industriales para aceite

Item Codice Artikelnummer Code Referencia	Cooling capacity Capacità di raffreddamento Kühlleistung Capacité de refroidissement Capacidad de enfriamiento	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD
TCO15	1600/1900 W	230 V 1~ 50-60 Hz	595 x 995 x 678 mm
TCO22	2200/2550 W	230 V 1~ 50-60 Hz	595 x 995 x 678 mm
TCO22	2200 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCO36	3300/3900 W	230 V 1~ 50-60 Hz	595 x 995 x 678 mm
TCO36	3300 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCO44	4400 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCO55	5300 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCO56	6000 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
TCO70	8100 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
TCO91	9200 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
TCOA0	10900 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
TCOA2	12300 W	400 V 3~ 50 Hz	744 x 1335 x 1360 mm
TCOA4	16400 W	400 V 3~ 50 Hz	744 x 1335 x 1360 mm
TCOA7	17800 W	400 V 3~ 50 Hz	744 x 1335 x 1360 mm
TCOA9	20700 W	400 V 3~ 50 Hz	744 x 1335 x 1360 mm
TCOB2	23000 W	400 V 3~ 50 Hz	844 x 1485 x 1759 mm
TCOB7	28300 W	400 V 3~ 50 Hz	844 x 1485 x 1759 mm
TCOC1	32800 W	400 V 3~ 50 Hz	844 x 1485 x 1759 mm
TCOC8	37600 W	400 V 3~ 50 Hz	844 x 1485 x 1759 mm
TCOD4	41400 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm
TCOE0	46100 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm
TCOE4	56600 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm
TCOF7	65600 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm
TCOG8	75200 W	400 V 3~ 50 Hz	1094 x 1599 x 2062 mm



TCU

- Industrial chillers for dirty oil
- Refrigeratori industriali per oli inquinati
- Kühlgeräte für verunreinigte Öle für Industrieanwendungen
- Réfrigérateurs industriels pour huiles polluées
- Refrigeradores industriales para aceites contaminados

Item Codice Artikelnummer Code Referencia	Cooling capacity Capacità di raffreddamento Kühlleistung Capacité de refroidissement Capacidad de enfriamiento	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD
TCU15	1600/1900 W	230 V 1~ 50-60 Hz	595 x 995 x 678 mm
TCU22	2200/2550 W	230 V 1~ 50-60 Hz	595 x 995 x 678 mm
TCU22	2200 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCU36	3300/3900 W	230 V 1~ 50-60 Hz	595 x 995 x 678 mm
TCU36	3300 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCU44	4400 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCU55	5300 W	400 V 3~ 50 Hz	595 x 995 x 678 mm
TCU56	6000 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
TCU70	8100 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
TCU91	9200 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm
TCUA0	10900 W	400 V 3~ 50 Hz	681 x 1236 x 805 mm



TCI

- Immersion coil chillers
- Refrigeratori a serpentina immersa
- Kühlgeräte mit Tauchschlangenrohr
- Réfrigérateurs à serpentin immergé
- Refrigeradores de serpentín sumergido

Item Codice Artikelnummer Code Referencia	Cooling capacity Capacità di raffreddamento Kühlleistung Capacité de refroidissement Capacidad de enfriamiento	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD
TCI56	6000/7100 W	400 V 3~ 50 Hz/460 V 3~ 60 Hz	550 x 1432 x 550 mm
TCI70	8100/9650 W	400 V 3~ 50 Hz/460 V 3~ 60 Hz	550 x 1432 x 550 mm
TCI91	9200/11000 W	400 V 3~ 50 Hz/460 V 3~ 60 Hz	550 x 1432 x 550 mm
TCIA2	12300/14600 W	400 V 3~ 50 Hz/460 V 3~ 60 Hz	549 x 1636 x 1002 mm
TCIA4	16400/16200 W	400 V 3~ 50 Hz/460 V 3~ 60 Hz	549 x 1636 x 1002 mm
TCIA7	17800/20450 W	400 V 3~ 50 Hz/460 V 3~ 60 Hz	549 x 1636 x 1002 mm



SAW

- Water-air heat exchangers
- Scambiatori acqua-aria
- Wasser/Luft-Wärmetauscher
- Échangeurs eau - air
- Intercambiadores agua-aire

Item Codice Artikelnummer Code Referencia	Cooling capacity Capacità di raffreddamento Kühlleistung Capacité de refroidissement Capacidad de enfriamiento	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD
SAW10	1500/1750 W	230 V 1~ 50-60 Hz	325 x 252 x 550 mm
SAW50	5000/5650 W	230 V 1~ 50-60 Hz	520 x 660 x 230 mm
SAWA0	10000 W	230 V 1~ 50 Hz	595 x 995 x 678 mm




TTW

- Temperature controllers
- Termoregolatori
- Temperaturregler
- Thermorégulateurs
- Termorreguladores

Item Codice Artikelnummer Code Referencia	Heating capacity Capacità di riscaldamento Heizleistung Capacité de chauffage Capacidad de calentamiento	Power supply Alimentazione Stromversorgung Alimentation Alimentación	Dimensions Dimensioni Abmessungen Dimensions Medidas WxHxD
TTW90	3000/6000 W	400 V 3~ 50 Hz	304 x 550 x 795 mm
TTW95	3000/6000/9000/12000 W	400 V 3~ 50 Hz	304 x 730 x 795 mm



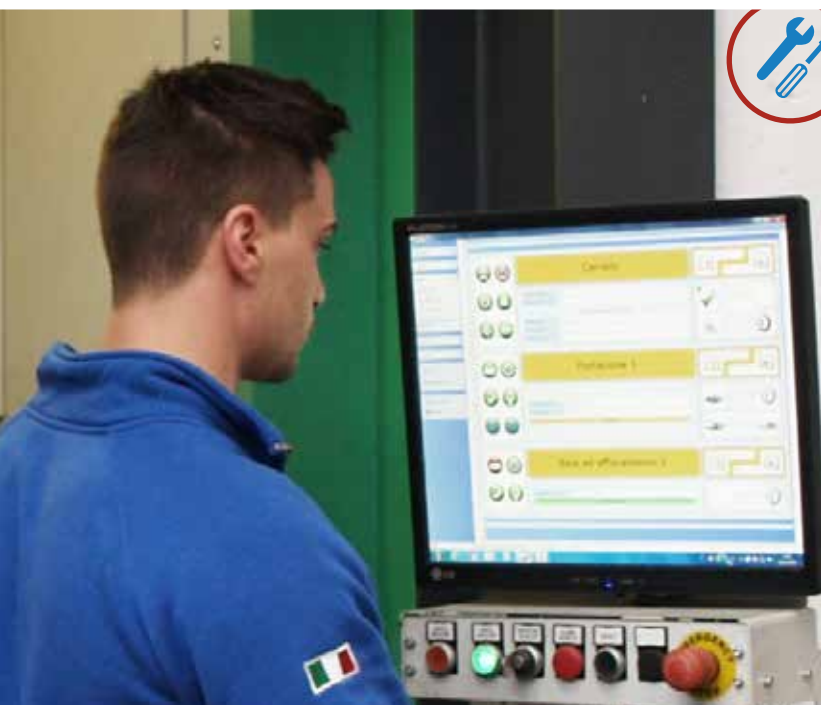

service@texaindustries.com







www.texaindustries.com



info@texaindustries.com



service@texaindustries.com



texa industries S.r.l. PEGOGNAGA - MANTOVA - ITALY - Strada Cà Bruciata, 5
Tel. +39 0376-554511 - FAX +39 0376-558606