

12

C-ONE MOTUS



Technical Data

Height	2380 mm
Width	590 mm
Length	1846 mm
Weight	320 kg
Power supply	24 V or 230 VAC 1PH+N+PE
Power absorption	20 Ah or 0,80 kW

**Portable Version:
Reduced Wrapping Area**

**Portable Version:
Wrapper Goes To The Pallet**

Fixed Version: great Value For Money


C-One Motus

A rotating arm that is also a portable wrapper: a flexible solution that allows you to wrap where you need to wrap.

A new family of rotating arms that delivers plenty of solutions. C-One Motus is available in 3 versions: 1) EPT to work in combination with an electrical pallet truck which it is fixed to. It is powered by the electrical pallet truck battery, in this way there will be 2 machines in 1, a pallet truck that is still a pallet truck but also a pallet wrapper 2) HPJ to be transported thanks to its wheels and steering. It has its own battery so it can be taken to any area wrapping is required 3) FIX to be bolted to the floor or including stabilizing mass if you plan to change its position. It is powered by a normal 230VAC power supply. C-One Motus EPT and HPJ have the exclusive yo-yo system, that allows perfect wrapping of the wooden pallet despite the forks of the pallet truck.

C-One Motus offers the advantages of a rotating arm and a mobile wrapper, all in one!

12 C-ONE MOTUS *Semi-Automatic*

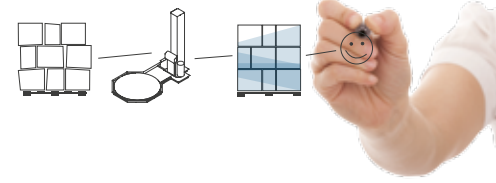

Product Specifications

- > Electronic printed circuit board for the management of the cycle
- > Frequency controller for arm speed adjustment (from 3 to 12 rpm)
- > Frequency controller for carriage speed adjustment (speed going up and speed going down can be set differently)
- > Maximum wrapping height: 2000 mm
- > Maximum size of the pallet 800x1200 mm
- > Electromagnetic brake for film stretching
- > Photocell for pallet height detection
- > Safety stop at the bottom of the arm
- > Stop at 0 position
- > Power board ip54
- > 4 digit display
- > 2 access key (including lock mode)
- > Adjustable parameters by the control panel: cycle selection, bottom turns, top turns, rotation speed, carriage speed going up, carriage speed going down, film tension.
- > Many parameters available at upper password level
- > Reinforcing operation
- > 3 working cycles: ascent/descent; topsheet; only ascent
- > 6 programs can be saved by the customer
- > Special cycle "do what I did"
- > "Yo-yo" system for a better connection of the load to the pallet
- > Easy system to fix the machine to the pallet truck
- > 2 working mode: semimanual, semiautomatic.
- > Acoustic warning at the cycle start and stop
- > Autodiagnostic
- > Powder coating
- > Braked arm at the end of the cycle
- > 2 years warranty



Version For Hand Pallet Jack



Fixed Version



Yo-Yo System

Main Options

- 2000 mm inner diameter for 1200x1200 pallet
- Battery kit
- Status light
- Photocell for black loads