

## UltraMatic 420

The latest generation in banding !



### ■ FEATURES

This device combines the latest banding technology based on its technique and product safety.

The exchange of film and paper is fast and easy due to the half automatic feed in system. There is no need of machine alteration.

The table banding machines - UltraMatic 420 - is unique in its class. The newly developed quick sealing technology makes it possible to use three different kinds of banding material.

- Paper brown
- Paper white
- Film transparent
- Stretch Banding film

### ■ TECHNICAL DATA

|                |                      |
|----------------|----------------------|
| Frame width    | 420 mm               |
| Frame height   | 200 mm               |
| Feed in system | Half automatic       |
| Band width     | 29 mm                |
| Tension        | Variable             |
| Voltage        | 230V / 50 Hz - 200 W |
| Speed          | ~ 32 cycles          |


### ■ SPECIFICATIONS

|                |        |
|----------------|--------|
| Machine height | 570 mm |
| Width          | 490 mm |
| Depth          | 346 mm |
| Weight         | 33 kgs |

Banding table  
variable in height

## Banding - In Time !

- ➔ Quick product cycles
- ➔ Optimal band tension
- ➔ Economic banding material

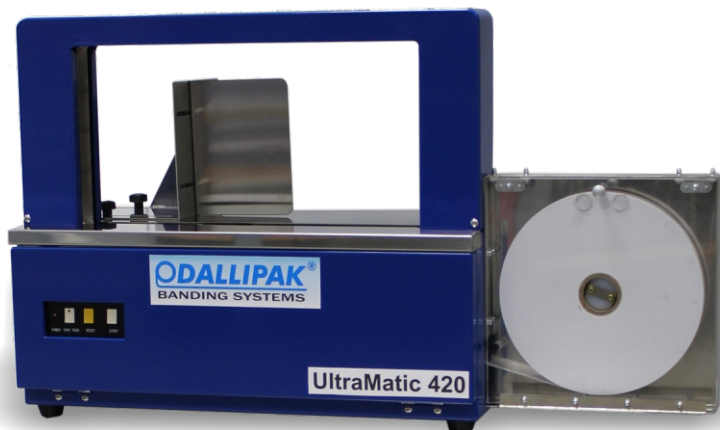


The UltraMatic 420 with side roll dispenser is technically identical to our UltraMatic 420. The big advantage of this machine is that you can use banding material with a length up to 500 meters. With a long roll dispenser you can even use rolls up to 1000 meters. So the machine moves into the area of floor-mounted appliances but with a much more interesting price.

### ■ BANDING MATERIAL

| Type             | Width | Length         |
|------------------|-------|----------------|
| Film transparent | 29 mm | 200/500/1000 m |
| Stretch film     | 29 mm | 250/500/1000 m |
| Paper brown      | 29 mm | 180/500/1000 m |
| Paper white      | 29 mm | 180/500/1000 m |

- Advantages**
- Latest Banding technology
  - Simple in Usage
  - Stable construction
  - Wear and tear free frame
  - AC-Motors with direct drive
  - Operation through footbar switch or photo lense eye

## Additional Equipment



The product stopper made out of stainless steel can be adjusted vertically and horizontally via handscrews.



You can use rolls with up to 500 meters in our side roll dispenser.



The wagon (400x800 mm) is variable in height and built out of burnished, stainless steel.



Our long roll dispenser is variable in height and makes it possible to use long rolls with up to 1000 meters.

## Banding center DALLIPAK

DALLIPAK GmbH  
Gewerbepark Mitterfeld 1  
2523 Tattendorf - Austria

Tel.: +43 / (0)2253 / 81045  
Fax.: +43 / (0)2253 / 81046  
E-Mail: [info@dallipak.at](mailto:info@dallipak.at)

Internet: <http://www.dallipak.at/>

Changes, printing and other errors reserved.

UltraMatic 420