

*hacona*



**C-SERIES**

Table top heat sealer

Premium quality. Reliable. Value for money.

# Table top heat sealer

Premium quality. Reliable. Value for money.

C-series heat sealers are very easy to operate and require minimal working space. They are suitable for a wide range of packaging applications in production, order fulfilment and office environments. Simply connect to a 230 V power supply and they are ready to go.

The C-series machine range is produced in five sizes, with sealing lengths ranging from 220 mm to 820 mm.


## C-MODEL

ORANGE POWDER COATED FINISH



## CI-MODEL

WITH ANODISED ALUMINIUM FRAME AND STAINLESS STEEL FITTINGS FOR THE FOOD INDUSTRY

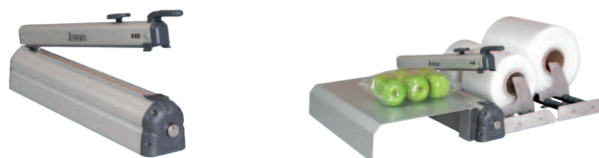

### SIMPLE OPERATION

- Adjustable sealing time
- Sealing bar can be closed manually
- LED red/yellow light display for sealing
- 2.5 mm sealing width
- Integrated security cutting knife system

### SUITABLE FOR SEALING

- PE, PP, PA, PVC and other thin laminated films
- PE film, up to two layers of 200 microns

### ACCESSORIES

- Working table
- Film roll with split roll technology



Working table



Film roll with split roll technology



Film roll with split roll technology and guiding plate



Typical application: double working table and double film roll

Technical data	C-220 / CI-220	C-320 / CI-320	C-420 / CI-420	C-620 / CI-620	C-820 / CI-820
Max. sealing length [mm]	220	320	420	620	820
Sealing width [mm]	2,5	2,5	2,5	2,5	2,5
Max. sealable film width [mm]	200	300	400	600	800
Max. cutting width [mm]	200	300	400	600	800
IP protection class [IP]	IP 23	IP 23	IP 23	IP 23	IP 23
Electrical connection [V, Hz]	230, 50/60	230, 50/60	230, 50/60	230, 50/60	230, 50/60
Power [W]	180	218	248	365	468
Size of machine WxDxH [mm]	400x95x300	520x95x320	630x95x360	840x95x270	1030x95x320
Weight of machine [kg]	3.30	3.80	4.00	5.10	7.20

Specifications shown in this brochure are for general information only and cannot be considered to be the technical specifications of the products. We are not responsible for any issues arising as a result of printing errors. Products and their specifications may be subject to change without notice.



#### Hacona Kft.

H-1165 Budapest, Ujszasz u. 45/b. T ép. Hungary

Tel.: +36 (1) 401 3030

Fax: +36 (1) 401 3031

E-mail: mail@hacona.com

Web: www.hacona.com



#### Dealer: